

MK4 RENOVATOR

THE LEGEND CONTINUES





Easy to adjust
variable speed
gearbox with
achievable rates
from 0.8kg/ha
- 400kg/ha plus




(NEW) Option
of 5 or 6 inch
row spacing


(NEW) Large
loading platform
with safety rails
for easy access
and safety




(NEW) New design
agitator shaft,
steeper vees
and greater box
incline giving
better seed flow



(NEW) Bin lids
now open to 110°
with gas struts
on the outside
of the bins and
held closed
with latches



(NEW) Individually
sprung disc
openers with easy
change discs,
seals and bearings

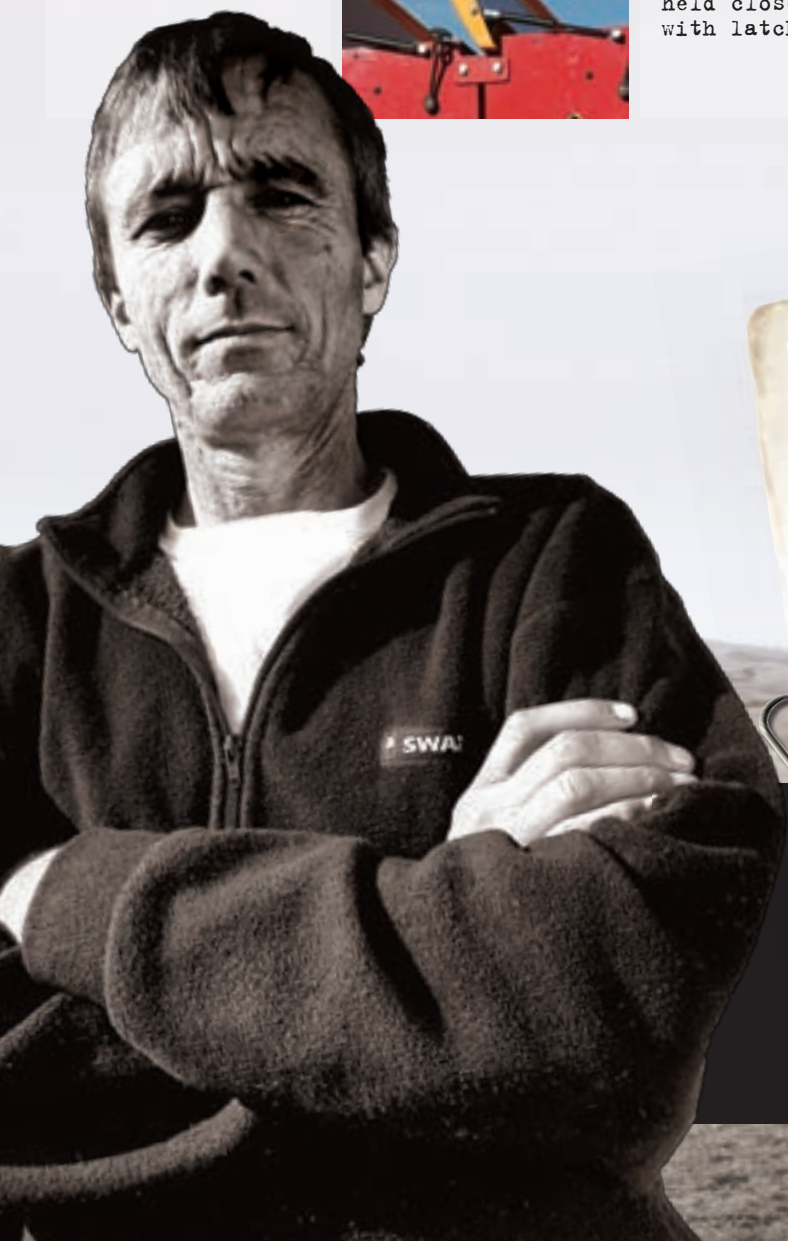

"... for direct drilling,
nothing beats the new MK4".

Barry Curtis, Albury



Large and small metering wheels for sowing a wide range of products from turnips through to peas and fertiliser



25mm coil tines with Duncan 'T' boot and a tungsten tile on the leading edge giving accurate seeding with superior strength and wear



A positive drive via an adjustable ground driven jockey wheel



Easy to set depth adjustment with a collar and threaded shaft adjuster



Easy platform access with foldable step



Easy calibration system with simple seed diversion into the trays provided





MK4 RENOVATOR

FEATURES

All MK4 Renovators come with the following features as standard

- Large capacity bins
- 25mm coil tine and Duncan 'T' boot with tungsten tile on leading edge
- Weather skirts to cover over seeder units
- Safety rails on platform
- Weigh kit with scales
- Electronic hectare meter
- Safety chains
- Stainless steel agitator shaft

Options and accessories

- Disc openers on the front of the drill
- Third/small seed box
- Tine Harrow or Uni-Roller following tool
- Rear tow bar
- Stainless steel box(es)
- Seed level indicator
- Hydraulic cylinder for drawbar
- Hydraulic cylinder for disc openers
- Baffle extension kit
- Lighting kit
- Harrow transport kit
- Jack stand

DIMENSIONS & CAPACITIES

	21 Run 3m	24 Run 3m	24 Run 3.5m	28 Run 3.5m
WIDTH (over wheels) (mm)	3070	3070	3570	3570
HEIGHT (ground wheels up) (mm)	2145	2145	2145	2145
OVERALL LENGTH (mm)	3825	3825	3825	3825
WEIGHT inc. disc openers (UNLADEN) (kg)	2030	2130	2360	2490
ROW SPACING (mm)	147.5	125	147.5	125
EFFECTIVE SOWING WIDTH (mm)	3097.5	3000	3540	3500
BOX CAPACITY (lt per box)	550	550	650	650
SMALL BOX CAPACITY (lt)	70	70	90	90

DUNCAN AG NEW ZEALAND

PO BOX 2018, WASHDYKE 7941, TIMARU

PH: 0800 177 171

Email: admin@duncanag.co.nz

www.duncanag.com

DUNCAN AG AUSTRALIA

4B SILVERTON CLOSE, NORTH LAVERTON, VICTORIA 3026

PH: 0061 393 149 666

Email: admin@duncanag.com.au



In accordance with the company's policy of continuous improvement to its machines, alterations in specifications may be made without notice. The company accepts no responsibility for any discrepancies which may occur between specifications of its machines and the descriptions thereof contained in this publication.